



Audio Test and Monitor Systems

GMS 2100 - GMS 2110 *

Sine wave generator (only for GMS 2100) – Peak meter – Phase meter – AD / DA Converter
Monitoring Router 4x1 for digital, 3x1 for analog signals – High Class Loudspeakers



GMS2100




* GMS2110 (without sine wave generator, remaining features as GMS 2100)



- 2 channel audio amplifier for 3 analog and 4 digital input signals
- integrated loudspeakers, 10 W
- level indicator for 2 channels (L, R)
- phase meter
- GMS 2100: Integrated sine wave generator with 2 frequencies: 800 Hz and 1000 Hz
- * GMS2110: without sine wave generator, remaining features as GMS 2100
- headphones connector
- analog-digital converter
- digital-analog converter
- analog and digital router 3x1 for analog and 4x1 for digital inputs
- Monitor signal simultaneously on analog and digital output available




Block diagram

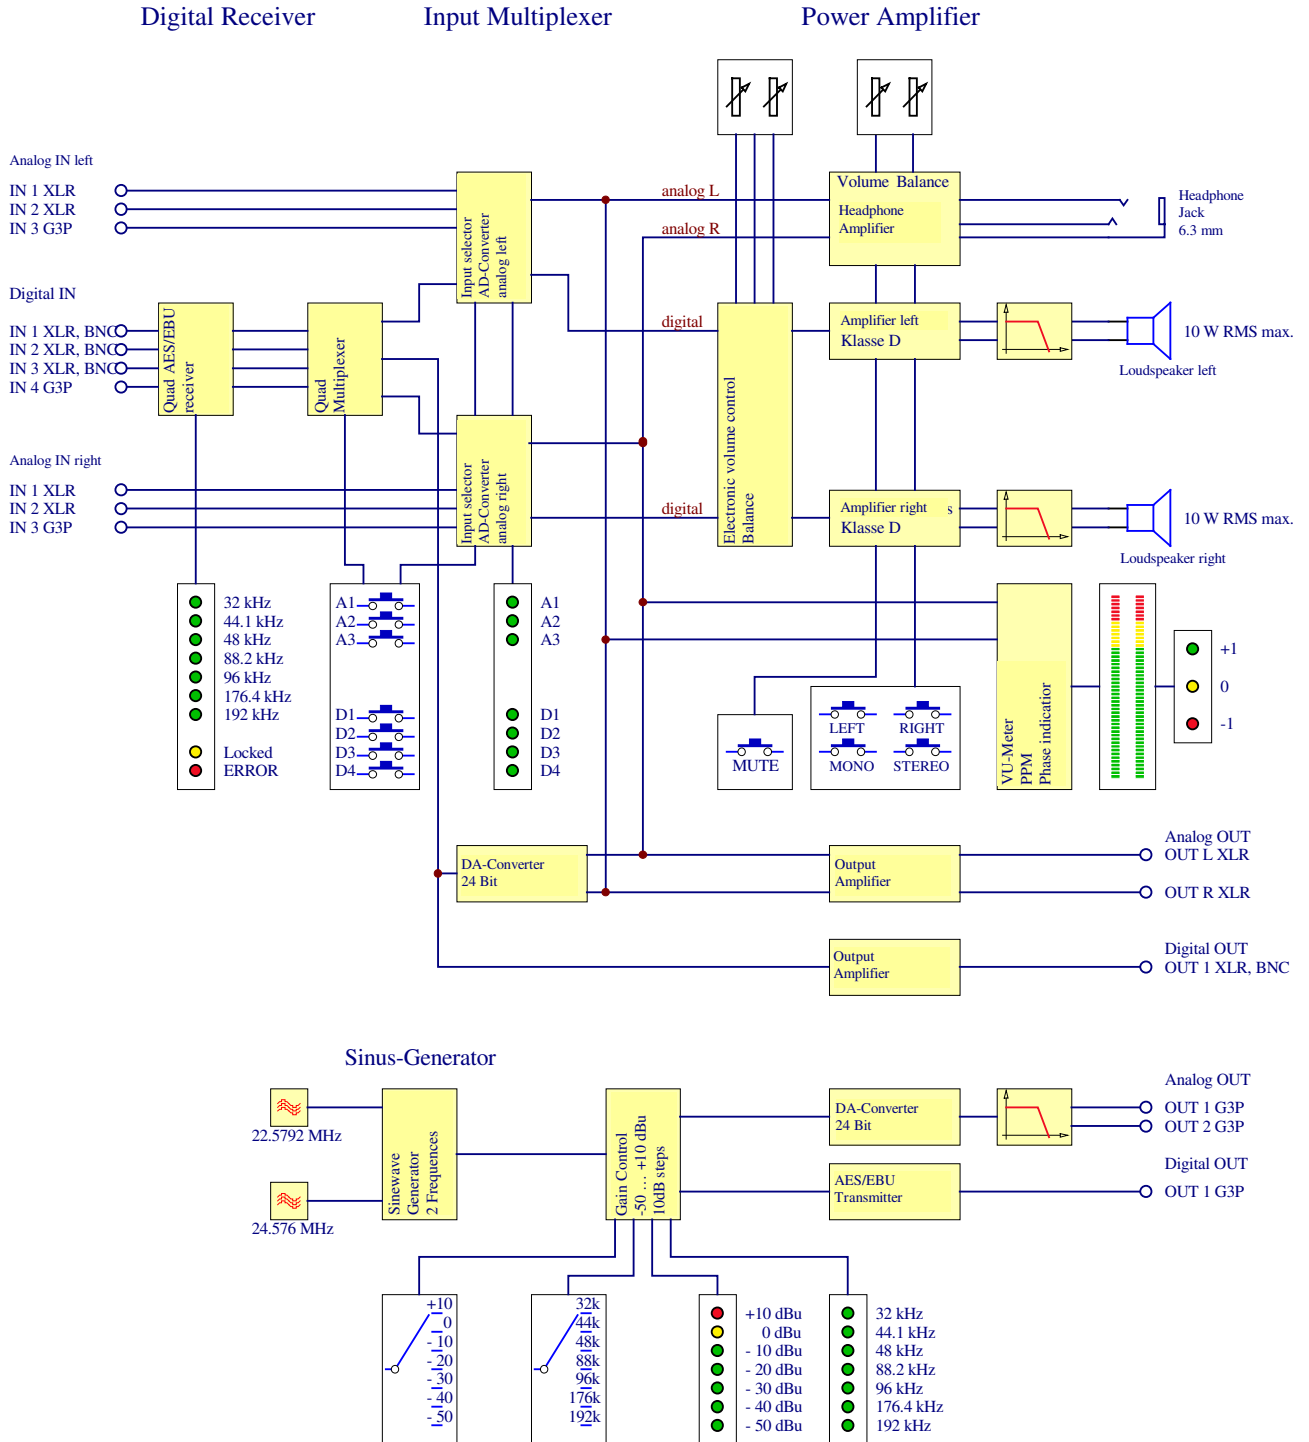

Operating elements on the front side

Phase meter

+1, green: mono compatible → in phase
 0, yellow: conditionally mono compatible signals
 -1, red: not mono compatible → out of phase signals

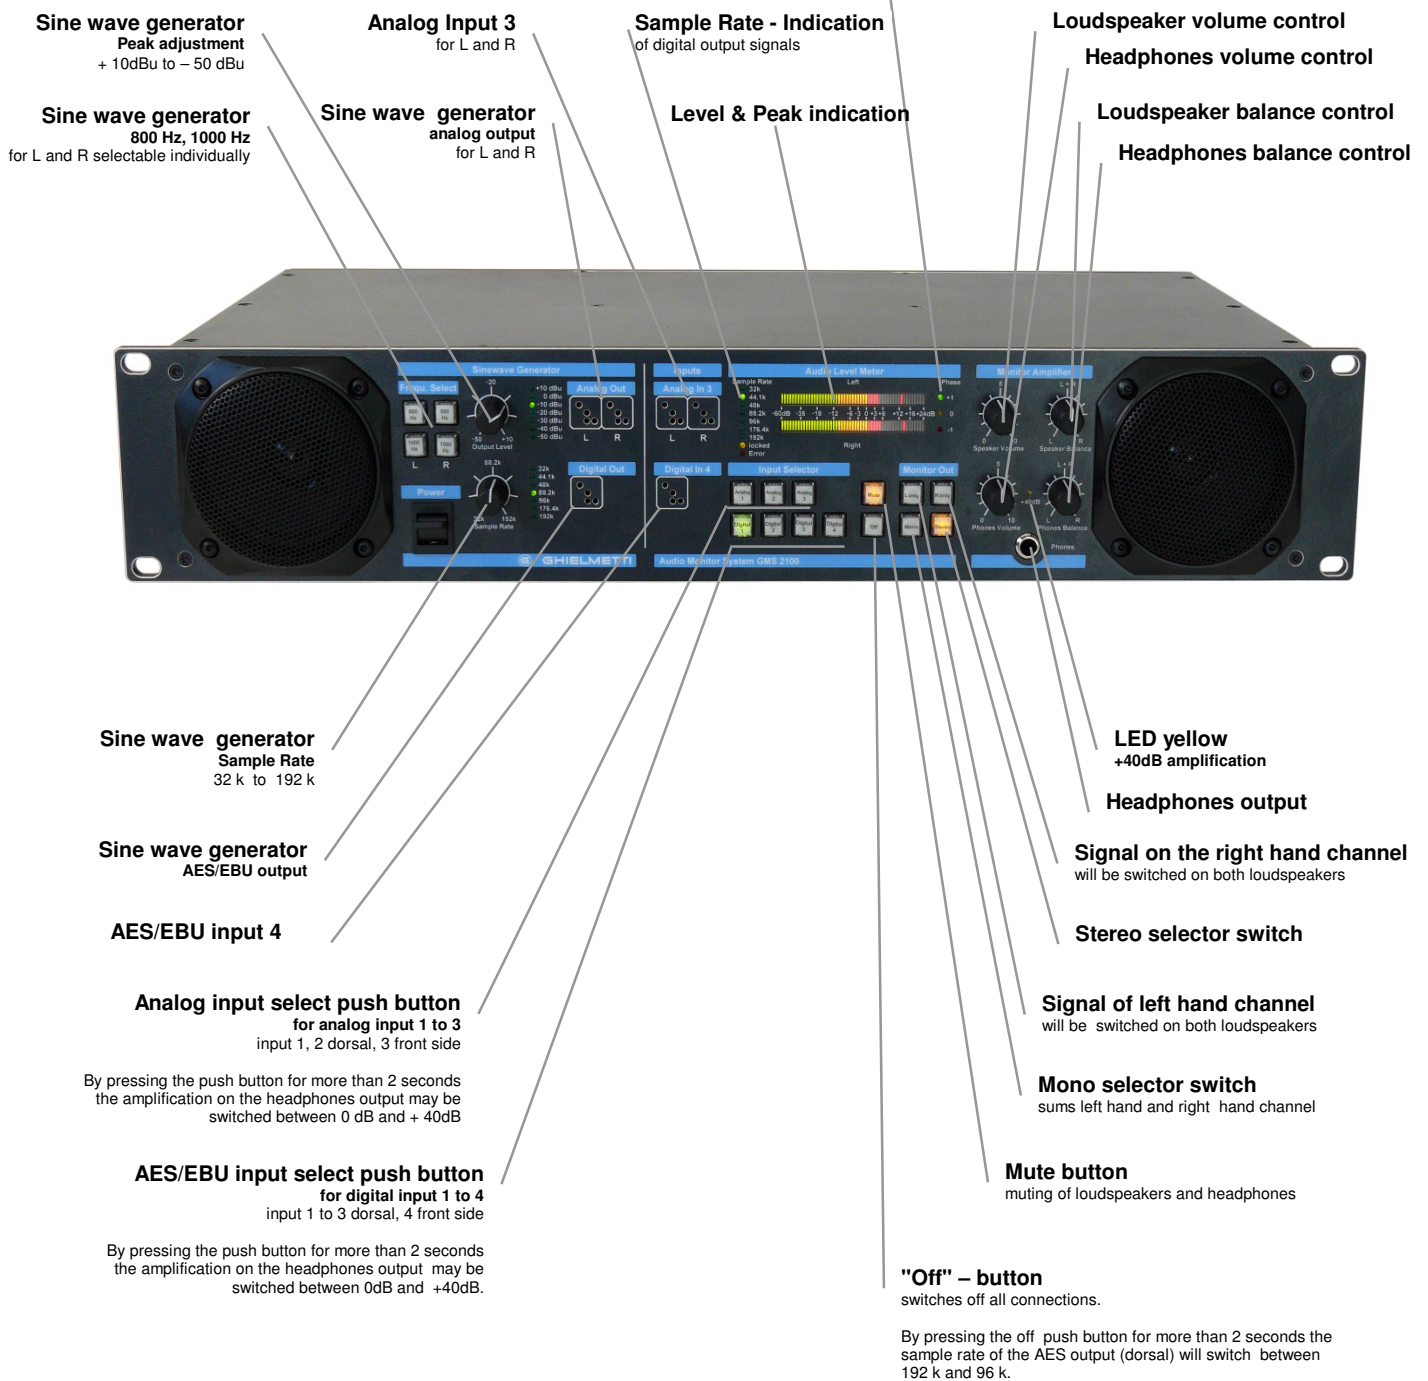



Audio inputs and monitor outputs on the back side.



Characteristics

Monitor amplifier

| | |
|---------------------------------------|--|
| Input signals: | analog to max. +27 dBu, 10 Hz ... 20 kHz digital 0.5 Vpp ... 7 Vpp |
| Sample rate | 32 kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz und 192 kHz |
| Input impedance: | analog: 20 k Ω bei 1 kHz, symmetrical digital: 110 Ω XLR, symmetrical 75 Ω BNC, asymmetrical |
| Inputs (dorsal): | 2 analog stereo channels, symmetrical, stereo jack connector 6.35mm 2 analog Stereo channels, symmetrical, XLR female 3 digital AES/EBU channels, symmetrical, XLR female 3 digital AES/EBU channels, asymmetrical, BNC 75 Ω |
| Inputs front side: | 1 analog stereo channel, symmetrical G3P (2x Ghielmetti 3 pole) 1 digital AES/EBU channel, symmetrical G3P (1x Ghielmetti 3 pole) |
| Outputs (dorsal): | 1 analog stereo channel, symmetrical, stereo jack connector 6.35mm 1 analog stereo channel, symmetrical XLR male 1 digital AES/EBU channel, symmetrical XLR male 1 digital AES/EBU channel, asymmetrical BNC 75 Ω |
| Gain between chosen input and output: | analog: 0 dB \pm 0.1 dB digital: Reshaping of Signal to 3 Vpp (XLR, 110 Ω termination) reshaping of Signal to 2.5 Vpp (BNC, 75 Ω termination) |
| Output impedance: | analog: 60 Ω at 1 kHz digital: 110 Ω XLR, 75 Ω BNC |



| | |
|---------------------|---|
| Output (frontally): | 1 Headphones output stereo, 6.35 mm jack |
| Power output: | 10 W RMS per channel |
| Operating controls: | separate volume and balance control for loudspeakers separate volume and balance control for headphones mute pushbutton, including mute LED 7 pushbuttons for selecting input 4 pushbuttons for selecting channel (left, right, mono, stereo) 1 power switch |



Analog inputs and outputs

| | | | | |
|-----------------------|----------|---|---|--------------------------------------|
| No. of stereo inputs | a-b-s | dorsal | 2 | symmetrical, 6.35mm stereo jack plug |
| | a-b-s | dorsal | 2 | symmetrical, XLR female |
| | a-b-s | frontally | 1 | symmetrical, G3P |
| Input impedance | a-b | 20 kΩ at 1 kHz | | |
| | a-s | 10 kΩ at 1 kHz | | |
| | b-s | 10 kΩ at 1 kHz | | |
| No. of stereo outputs | a-b-s | dorsal | 1 | symmetrical, 6.35mm stereo jack plug |
| | a-b-s | dorsal | 1 | symmetrical, XLR male |
| Output impedance | a-b | 60 Ω at 1 kHz | | |
| | a-s | 30 Ω at 1 kHz | | |
| | b-s | 30 Ω at 1 kHz | | |
| Output level | analog: | 0 dB ± 0.1 dB | | |
| | digital: | Signal reshaped to 3 Vpp (XLR, 110 Ohm termination) Signal reshaped to 2.5 Vpp (BNC, 75 Ohm termination) | | |

Digital inputs and outputs

| | | | | |
|------------------|---|-----------|---|-------------------------|
| No. of inputs | a-b-s | dorsal | 3 | symmetrical, XLR female |
| | a-s | | 3 | asymmetrical, BNC |
| | a-b-s | frontally | 1 | symmetrical, G3P |
| Input impedance | 110 Ω XLR, 75 Ω BNC, galvanically separated | | | |
| No. of outputs | a-b-s | dorsal | 1 | symmetrical, XLR male |
| | a-s | | 1 | asymmetrical, BNC |
| Output impedance | 110 Ω XLR, 75 Ω BNC, galvanically separated | | | |

Analog input → analog output

| | |
|------------------------------|--|
| Gain (10Hz-20kHz) | 0 dB ± 0.1 dB, chosen input to output |
| Signal-to-noise ratio | > 80 dB at 1 kHz und 0dBu input signal |
| Cross talk attenuation | > 80 dB at 1 kHz |
| Switch off attenuation | > 90 dB at 1 kHz, and 0 dBu input signal |
| Electrical distortion factor | < 0.1 % at 1 kHz and 0 dBu input signal |

Analog input → digital output

| | |
|------------------------------|---|
| Gain (20Hz-20kHz) | 0 dB ± 0.3 dB, chosen input to output |
| Signal-to-noise ratio | > 90 dB at 1 kHz and 0 dBu input signal |
| Cross talk attenuation | > 90 dB at 1 kHz |
| Electrical distortion factor | < 0.1 % at 1 kHz and 0 dBu input signal |



Digital input → analog output

| | |
|------------------------------|--|
| Gain (50Hz-20kHz) | 0 dB ± 0.3 dB, chosen input to output |
| Signal-to-noise ratio | > 75 dB at 1 kHz and -15dBFS input signal |
| Cross talk attenuation | > 90 dB at 1 kHz |
| Switch off attenuation | > 100 dB at 1 kHz and -15dBFS input signal |
| Electrical distortion factor | < 0.1 % at 1 kHz and -15dBFS input signal |

Digital input → digital output

| | |
|------------------------------|--|
| Gain (10Hz-20kHz) | 0dB chosen input to output |
| Signal-to-noise ratio | > 100 dB at 1 kHz and -15dBFS input signal |
| Cross talk attenuation | > 100 dB at 1 kHz |
| Electrical distortion factor | < 0.1 % at 1 kHz and -15dBFS input signal |

Sample rates 32 k ... 192 kS/s

Output signal Jitter < 2 ns

Loudspeakers amplifier

| | |
|-----------------------------------|--|
| Power output | midrange driver , tweeter max. 10 W RMS, per channel |
| Acoustic frequency range (± 5 dB) | 80 Hz ... 16 kHz, measured at 60 cm distance |

Headphones amplifier

| | |
|-------------------------------------|----------------------------|
| Power output on 8 Ohm | max. 0.2 W RMS per channel |
| Electrical frequency range (± 3 dB) | 20 Hz ... 20 kHz |
| Distortion factor | < 0.5 % at 1 kHz |

The loudspeaker amplification will be switched off once the headset is plugged in.

Analog digital converter

| | |
|--------------------|--|
| Resolution | 24 bits |
| Sample rate | selectively 96kHz or 192 kHz (switchover through the "Off" pushbutton) |
| Input level analog | max. +15 dBu for distortion free conversion |

Digital analog converter

| | |
|-------------|--|
| Resolution | 24 bits |
| Sample rate | automatically detection for the following frequencies: |
| | 32.0 kHz ± 3 % |
| | 44.1 kHz ± 3 % |
| | 48.0 kHz ± 3 % |
| | 88.2 kHz ± 3 % |
| | 96.0 kHz ± 3 % |
| | 176.4 kHz ± 3 % |
| | 192.0 kHz ± 3 % |

| | |
|----------------------------|--|
| Sample rate display | 7 LED's green for indication of sample rate |
| | 1 LED red for indication of failure |
| | 1 LED yellow for indication, if receiver is synchronised |

Pushbuttons

| | |
|--------------------------------------|---|
| 7 channel select pushbuttons: | Illuminated pushbuttons for each input, deactivating each other |
| "Off"-Switcher: | Illuminated pushbuttons for switching off the inputs |

| | |
|----------------|--|
| Display | Pushbutton of selected input respectively OFF lights |
|----------------|--|

| | |
|-------------|--|
| Mute | Pushbutton illuminated, when mute is switched on |
|-------------|--|

| | |
|---|---|
| Volume control (for Loudspeakers and headset) | linear potentiometer 300 °, range -80 dB ... 0 dB both channels together |
|---|---|

| | |
|--|--|
| Balance control (for Loudspeakers and headset) | linear potentiometer 300 ° 0 ° 150 ° 300 ° range left channel -80 dB 0 dB 0 dB range right channel 0 dB 0 dB -80 dB |
|--|--|

Level and phase indication


| | |
|------------------------------|---|
| Indication for level: | VU 53 segment bar graph LED per channel |
|------------------------------|---|


| | |
|-----------------------------------|--|
| Indication for peak value: | PPM 53 segment bar graph LED per channel 1 segment at the time |
|-----------------------------------|--|

| | |
|--------------------------|---|
| Indication range: | -60 dBu ... +24 dBu, scale specific labelling available |
|--------------------------|---|

Indication accuracy


| | | |
|--------------|-----------------|-------------------------|
| Nordic mode: | -60 ... -50 dBu | 5.0 dB ± 1.0 dB per LED |
| | -50 ... -20 dBu | 3.0 dB ± 1.0 dB per LED |
| | -20 ... -18 dBu | 2.0 dB ± 0.5 dB per LED |
| | -18 ... +18 dBu | 1.0 dB ± 0.2 dB per LED |
| | +18 ... +24 dBu | 2.0 dB ± 0.5 dB per LED |

Scaling of indication:

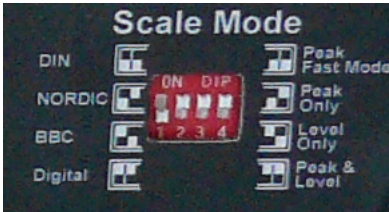


closable through DIP switch on dorsal


DIN 45406



Nordic N9




BBC British IIa



Scaling stripes for BBC scaling (accessories, to paste over DIN scaling)

Digital



Scaling stripes for Digital Scaling (accessories, to paste over DIN scaling)

Integration time:

| | |
|---------|----------------------|
| DIN | VU 300 ms, PPM 5 ms |
| Nordic | VU 300 ms, PPM 5 ms |
| BBC | VU 300 ms, PPM 10 ms |
| Digital | VU 300 ms, PPM 10 ms |

Reverse time:

| | |
|---------|-------------------------------------|
| DIN | VU 300 ms, PPM 1.7s pro 20 dB |
| Nordic | VU 300 ms, PPM 1.7s pro 20 dB |
| BBC | VU 300 ms, PPM 2.8s from "7" to "1" |
| Digital | VU 300 ms, PPM 1.7s pro 20 dB |

Indication mode:

| | |
|------------------|--|
| Peak, Fast Mode: | Indication of each value (each sample) |
| Peak only: | Peak value indication in the hold mode |
| Level only: | Level value indication |
| Peak & Level: | Level and peak indication |

Phase indication:

For controlling mono compatibility of stereo signals (r = correlation coefficient)
 LED green: $+0.1 < r < +1$ (mono compatible → in phase)
 LED yellow $-0.1 < r < +0.1$ (conditionally mono compatible signals)
 LED red: $-0.1 > r > -1$ (not mono compatible out-of-phase signals)

**Scaling of modulation display**

| LED-No. | DIN [dB] | Nordic [dB] | BBC | Digital [dBFS] |
|---------|----------|-------------|-----|----------------|
| 1 | -60 | -60 | - | -75 |
| 2 | -55 | -55 | - | -70 |
| 3 | -50 | -50 | 1 | -65 |
| 4 | -47 | -47 | - | -63 |
| 5 | -44 | -44 | - | -61 |
| 6 | -41 | -41 | - | -59 |
| 7 | -38 | -38 | - | -57 |
| 8 | -35 | -35 | - | -54 |
| 9 | -32 | -32 | - | -51 |
| 10 | -29 | -29 | - | -48 |
| 11 | -26 | -26 | 2 | -45 |
| 12 | -23 | -23 | - | -43 |
| 13 | -20 | -20 | - | -41 |
| 14 | -18 | -18 | - | -39 |
| 15 | -17 | -17 | - | -38 |
| 16 | -16 | -16 | - | -37 |
| 17 | -15 | -15 | - | -36 |
| 18 | -14 | -14 | - | -35 |
| 19 | -13 | -13 | 3 | -34 |
| 20 | -12 | -12 | - | -33 |
| 21 | -11 | -11 | - | -32 |
| 22 | -10 | -10 | - | -31 |
| 23 | -9 | -9 | - | -30 |
| 24 | -8 | -8 | - | -29 |
| 25 | -7 | -7 | - | -28 |
| 26 | -6 | -6 | - | -27 |
| 27 | -5 | -5 | 4 | -26 |
| 28 | -4 | -4 | - | -25 |
| 29 | -3 | -3 | - | -24 |
| 30 | -2 | -2 | - | -23 |
| 31 | -1 | -1 | - | -22 |
| 32 | 0 | T | - | -21 |
| 33 | 1 | 1 | - | -20 |
| 34 | 2 | 2 | - | -19 |
| 35 | 3 | 3 | 5 | -18 |
| 36 | 4 | 4 | - | -17 |
| 37 | 5 | 5 | - | -16 |
| 38 | 6 | 6 | - | -15 |
| 39 | 7 | 7 | - | -14 |
| 40 | 8 | 8 | - | -13 |
| 41 | 9 | 9 | - | -12 |
| 42 | 10 | 10 | - | -11 |
| 43 | 11 | 11 | 6 | -10 |
| 44 | 12 | 12 | - | -9 |
| 45 | 13 | 13 | - | -8 |
| 46 | 14 | 14 | - | -7 |
| 47 | 15 | 15 | - | -6 |
| 48 | 16 | 16 | - | -5 |
| 49 | 17 | 17 | - | -4 |
| 50 | 18 | 18 | - | -3 |
| 51 | 20 | 20 | 7 | -2 |
| 52 | 22 | 22 | - | -1 |
| 53 | 24 | 24 | - | 0 |

Sine Wave Generator



Output frequencies: 800 Hz and 1000 Hz

Frequency for left hand and right hand channel are individually, the levels are adjustable together. The output frequencies can be tapped as analog output and as AES/EBU signal.

Digital sampling rates:

32 kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, 192 kHz

AES/EBU format: Pro

Outputs frontside: 1 analog stereo channel, symmetrical G3P (2x Ghielmetti 3 pole)
1 digital AES/EBU channel, symmetrical G3P (1x Ghielmetti 3 pole)

Output level analog: adjustable in steps of 10 dB between -50 dBu and +10 dBu

Output level digital: 3 Vpp

Turn switch: linear potentiometer for sampling rate, 7 steps
linear potentiometer for volume of sinus signals, 7 steps

Display: LEDs for sampling rate indication
LEDs for volume indication in steps of 10 dB

General indication

Operating voltage: 90 VAC ... 267 VAC, 47 ... 63 Hz

Power: 60 Wmax.

Operation temperature: 0 °C ... +45 °C

Storage temperature: -20 °C ... +55 °C

Housing: 19" rack mounting, 2 RU, depth 250 mm

Weight: 5.8 kg



Ghielmetti AG
Switzerland, Headquarter
Tel: +41 32 671 13 13
Fax: +41 32 671 13 14
info@ghielmetti.ch
www.ghielmetti.ch

Europe & Africa



Ghielmetti in Austria
Ing. Johann Götz
Tel.: +43 699 1090 22 60
Fax: +43 699 1974 29 51
johann.goetz@chello.at



Ghielmetti in Belgium / Luxembourg
Wenglor and Lambda Bvba Sprl
Tel: +32 2 412 47 90
Fax: +32 2 412 47 99
info.be@wenglor.com
www.wenglor.com



Ghielmetti in Czech Republic
MediaTech spol. s.r.o.
Tel: +420 469 631 555
Fax: +420 469 631 888
sales@mediatech.cz
www.mediotech.cz



Ghielmetti in Denmark
Kinovox A/S
Tel: +45 70 22 38 11
Fax: +45 44 53 30 06
is@kinovox.dk
www.kinovox.com



Ghielmetti in Finland
Profitron Oy
Tel: +358 400 101 220
Fax: +358 20 755 9666
pekka.paukku@profitron.fi
www.profitron.fi



Ghielmetti in France
AUVIDIS
Tel: +33 1 43 99 94 05
Fax: +33 1 43 39 10 55
E-mail: info@auvidis.fr



Ghielmetti in Germany
Ghielmetti, Berlin
Tel. +49 3371 402 754
Fax: +49 3371 610 548
brodziak@ghielmetti.ch
www.ghielmetti.ch



Ghielmetti in Great Britain
Argosy
Tel: +44 1844 202 101
Fax: +44 1844 202 025
sales@argosycable.com
www.argosycable.com



Ghielmetti in Greece
AUDIGYS
Tel: +30 210 764 94 35
Fax: +30 210 764 94 34
info@audigys.gr
www.audigys.gr



Ghielmetti in Italy
CPE Italia spa
Tel: +39 02 39 09 61
Fax: +39 02 35 70 765
sales@cpeitalia.it
www.cpeitalia-group.com



Ghielmetti in Netherlands
Ceelen Techniek
Tel: +31 413 25 60 90
Fax: +31 413 25 51 60
info@ceelen.nl
www.ceelen.nl



Ghielmetti in Norway
Siv. Ing. Benum A/S
Tel: +47 22 13 99 00
Fax: +47 22 14 82 59
post@benum.no
www.benum.no



Ghielmetti in Poland
Pateh
Tel: +48 22 620 23 69
Fax: +48 22 627 05 76
pateh@pateh.com.pl
www.pateh.com.pl



Ghielmetti in Poland
TWENTY 4 SEVEN s.c.
Tel: +48 22 632 66 22
Fax: +48 22 632 66 52
gm@twenty4seven.pl
www.twenty4seven.pl



Ghielmetti in Portugal
Pinto Basto
Tel: +351 21 397 20 41
Fax: +351 21 397 25 95
Moura.tendeiro@pintobasto.pt
www.pintobasto.pt



Ghielmetti in Russia
Binar ProSound + Light
Tel: +7 495 730 73 33
Fax: +7 495 257 58 97
binar@binar.ru
www.binar.ru



Ghielmetti in Slovakia
elatec s.r.o.
Tel: +421 2 6542 0344
Fax: +421 2 6542 3660
elatec@elatec.sk
www.elatec.sk



Ghielmetti in Slovenia
Albin Promotion
Tel: +386 2 761 97 00
Fax: +386 2 761 97 29
info@ap-pro.si
www.albin-promotion.si



Ghielmetti in Spain
Promovisa S.A.
Tel: +34 914 562 090
Fax: +34 915 332 166
info@promovisa.es
www.promovisa.es



Ghielmetti in Sweden
Semafor Mediateknik AB
Tel: +46 8 556 785 50
Fax: +46 8 556 785 55
bz@semafor.se
www.semafor.se



Ghielmetti in Ukraine
Technical Brothers Ltd.
Tel: +380 44 587 97 81
Fax: +380 44 587 97 82
info@techbrothers.tv
www.techbrothers.tv



Ghielmetti in Morocco
Abchir S.A.R.L
Tel: +212 22 86 44 51
Fax: +212 22 86 44 50
salima@abchir.com
www.abchir.com

Middle East



Ghielmetti in Israel
Broadcast Design - Micha Blum
Tel: +972 2 656 02 01
Fax: +972 57 796 12 24
mihablum@012.net.il
www.broadcastdesion.co.il



Ghielmetti in Iran
Besat Broadcasting Systems Co.
Tel: +9821 676 336
Fax: +9821 677 471
Besatsales@dpimail.net

Asia



Ghielmetti in China/Hong Kong
Delco Wire & Cable (Asia) Ltd.
Tel: +852 2 7999 393
Fax: +852 2 7989 323
delco@delcoasia.com
www.delcowire.com



Ghielmetti in India
AVF Distributors Pvt Ltd.
Tel: +91 22 2405 7187
Fax: +91 22 2405 41 90
info@avfindia.com
www.avfindia.com



Ghielmetti in Japan
Electori Co., Ltd.
Tel: +81 3 3530 62 00
Fax: +81 3 3974 24 21
international@electori.co.jp
www.electori.co.jp



Ghielmetti in Korea
Ko Hoong Multimedia Co., Ltd.
Tel: +82 2 487 00 69
Fax: +82 2 474 06 78
kmsong@chol.com
www.kohoong.com



Ghielmetti in Singapore
Broadcast Professional Pte. Ltd.
Tel: +65 622 55 115
Fax: +65 622 55 005
gary_teo@broadcastpro.com.sg
www.broadcastpro.com.sg



Ghielmetti in Vietnam
VISTAR Company Ltd.
Tel: + 844 828 76 66
Fax: + 844 825 00 99
duongnt@vistar.vn
www.vistar.vn