20-766 CANFORD XLR INLINE RF FILTER XLR in/out

Test Signal

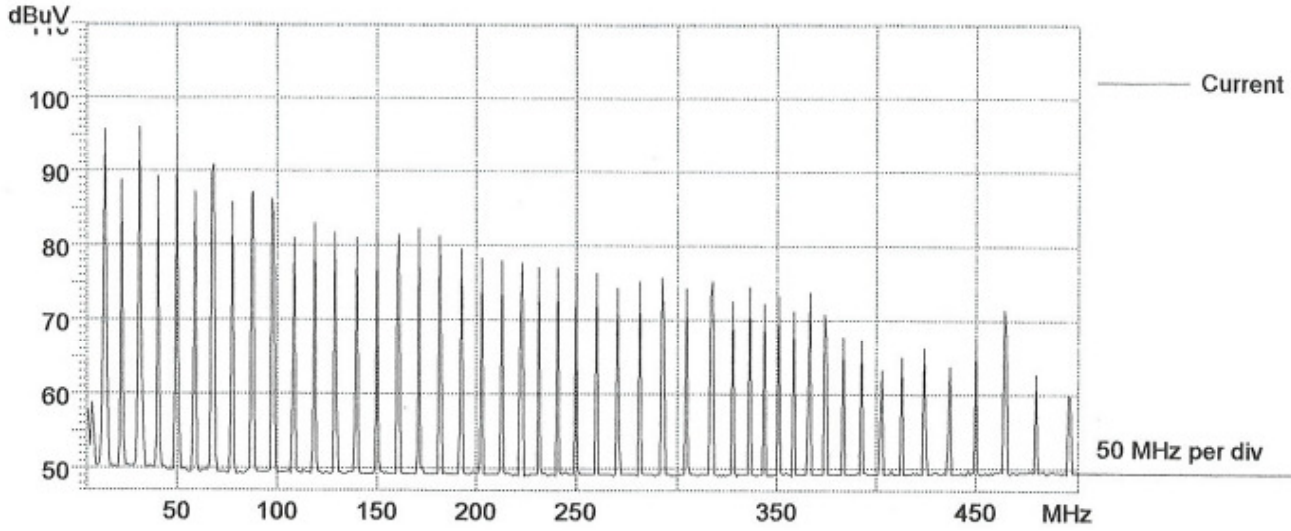

Limit: EN55011 Cls A, Grp 1, rad.
Range: 450 MHz
Centre Freq: 250 MHz
Impedence: 50 ohm
Attenuator: IN
Preamp: OFF
Source: Direct
Mode: PEAK

CANFORD AUDIO PLC
ISSUED BY REQUEST
10 JUL 2012
WILL NOT BE UPDATED
IF CHANGED

EMC Engineer 2.78

Printed: Wed Jul 08 10:42:08 1998

Test Signal with XLR RF Filter

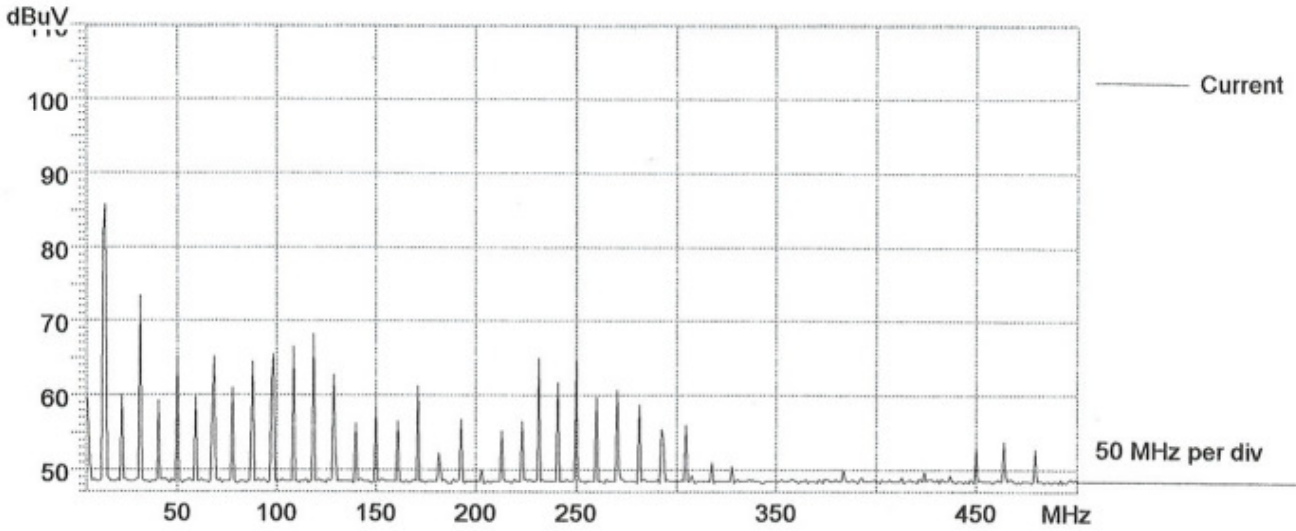

Limit: EN55011 Cls A, Grp 1, rad.
Range: 450 MHz
Centre Freq: 250 MHz
Impedence: 50 ohm
Attenuator: IN
Preamp: OFF
Source: Direct
Mode: PEAK

CANFORD AUDIO PLC
ISSUED BY REQUEST
WILL NOT BE UPDATED
IF CHANGED

EMC Engineer 2.78

Printed: Wed Jul 08 11:04:31 1998

distributed by
CANFORD
www.canford.co.uk