


LYNX

Testor



SD/HD SDI Video & AES Test Generator

Testor is a compact hand held broadcast quality digital test signal generator designed for today's demanding multi-format digital infrastructures. Ideally suited for signal path integrity testing the Testor provides digital video test patterns with embedded and external AES audio test signals. The flexible multi-format genlock input with cross lock capability and fully adjustable timing also allows signals to be inserted into any part of a modern digital multi-format system.

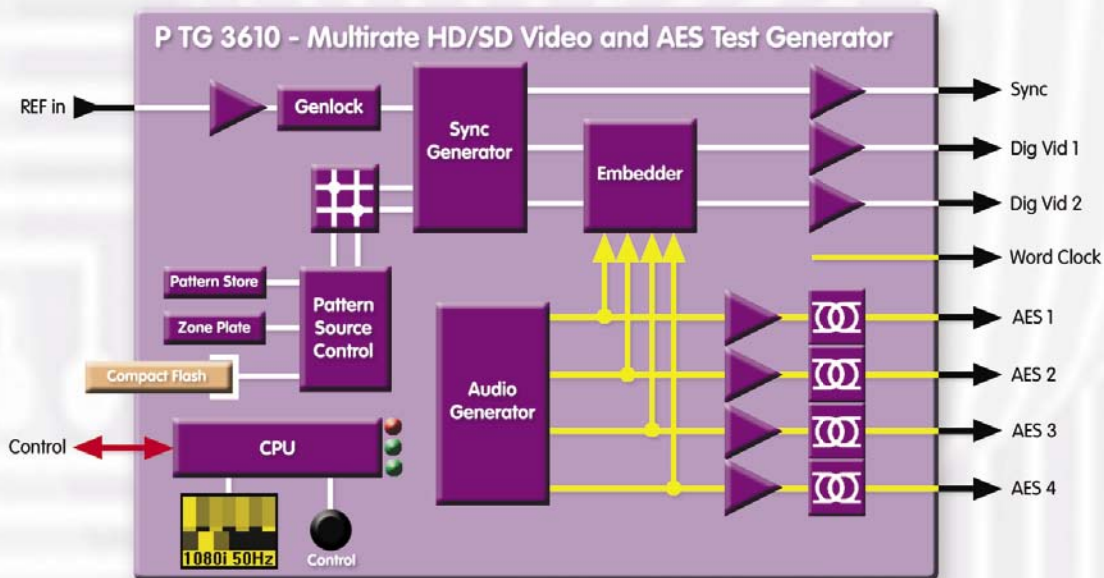

LYNX Technik AG
Brunnenweg 3
D 64331 Weiterstadt
Germany
PH +49 (0) 6150 1817 0
FX +49 (0) 6150 1817 10
www.lynx-technik.com

LYNX
TECHNIK AG

features



Multi-format Operation.

Chose from SDTV (**525** 50.94Hz / **625** 50Hz) or the following HDTV standards **1080i** 59.94Hz / 60Hz / 50Hz / **720P** / 60Hz / 59.94Hz / 50Hz / 30Hz / 29.97Hz / 25Hz / 24Hz / 23.98Hz **1080P** 30Hz / 29.97Hz / 25Hz / 24Hz / 23.98Hz **1080PSF** 25Hz / 24Hz / 23.98Hz



Two Simultaneous Digital Video Outputs.

Each output can have a different test pattern assigned from the internal test pattern library.



8 Channel Audio Test Generator.

8 independent digital audio test signals are provided (20 or 24 bit). Each channel has fully adjustable gain (0 to -60db FS), test tone frequency (20Hz to 20KHz in 1KHz steps), adjustable phase and selectable momentary pause (silence). The 8 audio channels are arranged into 8 x AES streams and can be embedded into both video outputs and also 4 x AES supplied as external signals.



Comprehensive Test Pattern Library.

An internal library of static standard test patterns is included, as well as dynamic patterns including a real time zone plate generator IRT audio synchronization pattern and a LCD panel persistence test.



Integrated Compact Flash Slot. (PTG FLASH option)

Load your own patterns using standard DPX files. Requires option code to enable the compact flash slot



Genlock with Cross Lock and Input Timing.

Flexible reference input allows the Testor to genlock to SDTV analog bi-level sync or HD tri-level sync sources (auto detect standard). Cross lock capability allows a SDTV ref sync input to generate a genlocked HD tri-level output sync (and visa versa). Input timing adjustment of one frame is provided adjustable in lines and pixels so the Testor can be genlocked and timed into any system installation.



Word Clock Reference Output.

A 48KHz +5v TTL word clock reference signal is provided for audio applications which require an external reference. Both the video sync and word clock outputs will free run with no reference connected and can be used a sync reference source. With reference sync presence, all video / audio / sync and word clock outputs are frequency locked to reference.



Character Overlay.

User defined character overlay for source identification purposes. Provides 22 characters overlay with selectable font color, background color and screen position. Separate character generator provided for each of the two video outputs.



Integrated Display for Control and Configuration.

A simple monochromatic display is provided which can show the selected test pattern for each output as well as providing the on screen menu and control selections. Control and setup is simple using the integrated rotary / push switch control knob.



Integrated CPU with Flash Ram.

All settings made to Testor are automatically stored in internal flash ram and are preserved through power cycles and long term storage. No loss of module settings should AC power fail or if the module gets accidentally disconnected or a battery fail.



PC Interface for Control and Configurations.

As an alternative to the integrated local control it's also possible to use the standard LYNX RCT 3000 Service Adapter and control Testor using a standard Windows PC or laptop. The on screen GUI to simplifies Testor configuration set-up and control. Settings are stored into internal flash ram. If you already have a LYNX Service Adapter then Testor will be recognized automatically.



Flexible Power Options.

Depending on the application you might choose one or all of the available power options for Testor. Use AC power from a LYNX AC power brick or the LYNX re-chargeable battery belt back, or for mobile production use the convenient Anton Bauer battery adapter which allows the use of any standard camera Anton Bauer battery or use the XLR power adapter for any battery (9-15v).



Hard Case Options.

For mobile use we offer two hard case options. Testor is securely mounted inside the case and used while fitted inside the case. Both cases are airtight and watertight and can take a real beating. Both are self contained solutions including integrated AC power supplies and a USB interface (plus the control software). One version is self powered with a lithium polymer battery giving 6 hours of continuous use, with integrated smart charger.




Simple Future Upgrades.


Your investment is protected as Testor is fully field programmable. Any additional features, firmware revisions or bug fixes can be programmed into all Testors (requires unit is returned to a LYNX service center)

patterns

Static Test Patterns

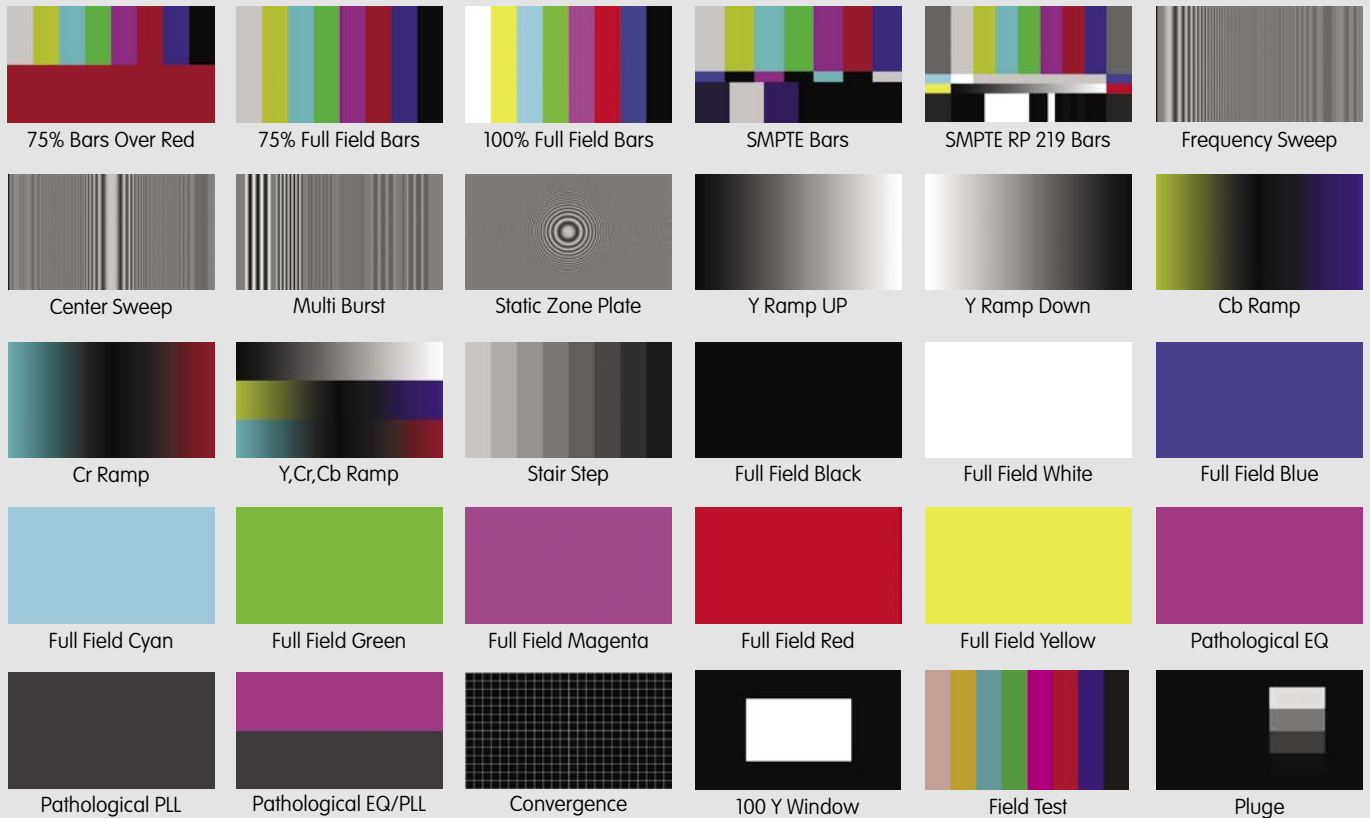

Dynamic Test Patterns

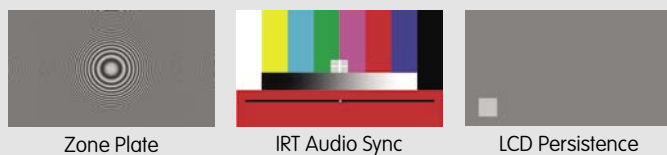

Character Overlay




- User defined text (22 characters)
- User defined font color
- User defined background color
- User defined screen position
- Independent for each output

Design and Load Your Own Patterns

With the compact flash slot enabled its possible to load any standard DPX file into Testor for as a custom test pattern, or download additional test patterns from the LYNX website.

IRT Audio Synchronization Test Pattern

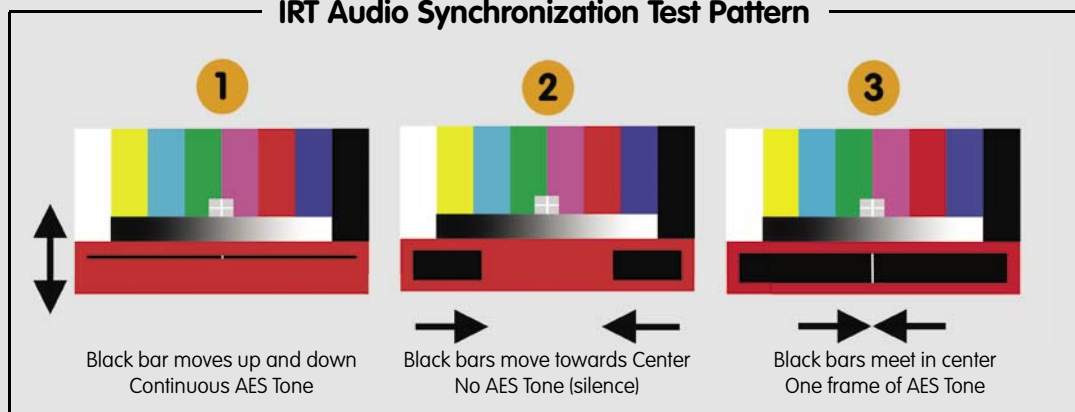


ordering info / options

Basic Testor



P TG 3610 B

With BNC Connections for external unbalanced AES3id audio

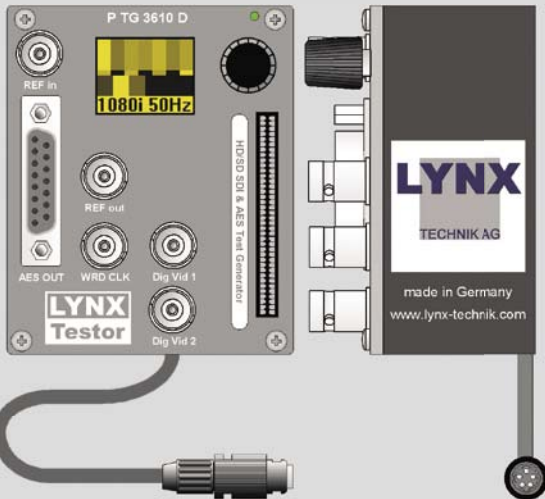

P TG 3610 D

With SubD Connector for external balanced AES3 audio

Power Options

R PS 3001-3
In Line AC Power Supply



R PS 3001-E/U
Wall Mount AC Power Supply



R PS XLR
XLR Battery Power Adapter (9-15vDC)



R PS 3100
Belt Battery Pack With Charger



R FR 3002
Anton Bauer Battery Adapter (Battery / charger not included)



Other Options

P TG FLASH
Option code to enable the compact flash slot to load your own image files (DPX files).

LYNX software

R CT 3002
USB Service Adapter and control software for the control and configuration of Testor using standard PC or laptop



R AC M15-4
Audio breakout cable for "D" version of Testor. 15 pin SubD to 4 x male in line XLR connectors



Hard Case Options

Protect your investment with one of our compact hard case options. Testor is securely mounted and used while fitted inside the case. These robust, airtight and watertight cases provide maximum protection for mobile use.

R FR 3600
Integrated AC supply
Integrated USB port + S/W
Ext DC input connector
(For RPS 3100 battery or RPS XLR adapter)

Testor securely mounted in case and used while fitted with the lid open



R FR 3610
Integrated AC supply
Integrated USB port + S/W
Integrated Battery (6 hour run time)
Integrated smart charger

Testor securely mounted in case and used while fitted with the lid open



Genuine custom **PELICAN** cases