

CM608-SLV

6.5" two-way loudspeaker, silver



The CM608 two-way built-in low impedance loudspeaker is "the reference loudspeaker". It can be used with a standard hi-fi amplifier and provides you with a Pro HiFi sound.

The loudspeaker has an enforced 6 ½" woofer and 1" tweeter. It makes the CM608 very suitable for the distribution of background music. The housing is made of high quality ABS and the woofer is made out of polypropylen, what makes it moisture-proof.

This loudspeaker is easy to install, due to its simple, quick mounting system (3 screws which are hidden behind the loudspeakergrill, which gives the loudspeaker a modern and striking design).

From 12 pieces on, the CM608 loudspeakers can be painted optionally in any other RAL color (REF: PAINT-CM).

TECHNICAL SPECIFICATIONS

| | | | |
|--------------------------------------|------------------------|-----------------------------------|---------------|
| outside diameter in mm | 205 | depth in mm | 75 |
| cutout in mm | 186 | loudspeaker system | 2-way |
| woofer size in inch | 6,5 | woofer cone material | polypropylene |
| tweeter size | 1 inch | mounting system | 3 screws |
| colour | white / black / silver | impedance in ohms | 8 |
| low impedance dynamic power in watts | 60 | SPL 1W/1m in dB | 92 |
| max SPL 1m in dB | 104 | frequency response in Hz | 60 - 20K |
| main construction material | ABS plastic | grille main material | aluminium |
| IP rating | 54 | applicable low impedance | Yes |
| applicable in 100V | No | Vertical dispersion angle 1000 Hz | 180° |

[MORE PICTURES](#)




ACCESSORIES



T60

8 ohms / 100 volt transformer, 60 watts

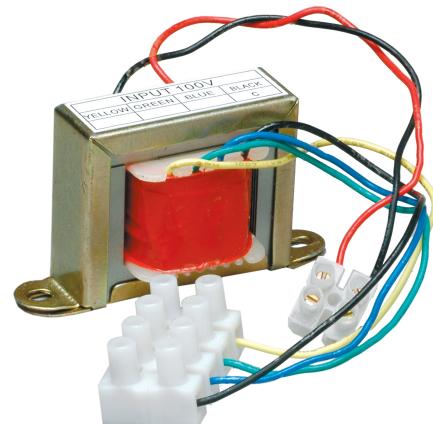

T20

8 ohms / 100 volt transformer, 20 watts



CMBB

On-Wall box for CM loudspeaker range