


CANFORD BALANCED TO UNBALANCED CONVERTER Inline, line level



- 49-271 CANFORD BALANCED TO UNBALANCED CONVERTER XJH Inline, line level. XLR to 6.35mm mono jack
- 49-272 CANFORD BALANCED TO UNBALANCED CONVERTER XFBH Inline, line level. XLR to XLRM
- 49-273 CANFORD BALANCED TO UNBALANCED CONVERTER XMBH Inline, line level. XLRM to XLR
- 49-274 CANFORD BALANCED TO UNBALANCED CONVERTER PHMXFH Inline, line level. XLR to RCA(phono)
- 49-275 CANFORD BALANCED TO UNBALANCED CONVERTER PHMXMH Inline, line level. XLRM to RCA(phono) male
- 49-276 CANFORD BALANCED TO UNBALANCED CONVERTER PHFXFH Inline, line level. XLR to RCA(phono) female
- 49-277 CANFORD BALANCED TO UNBALANCED CONVERTER PHFXMH Inline, line level. XLRM to RCA(phono) female
- 49-361 CANFORD BALANCED TO UNBALANCED CONVERTER BNCMXFH Inline, line level. XLR to BNC male
- 49-362 CANFORD BALANCED TO UNBALANCED CONVERTER BNCMXMH Inline, line level. XLRM to BNC male
- 49-363 CANFORD BALANCED TO UNBALANCED CONVERTER MJPXFH Inline, line level. XLR to 3.5mm jack plug
- 49-364 CANFORD BALANCED TO UNBALANCED CONVERTER MJPXMH Inline, line level. XLRM to 3.5mm jack plug

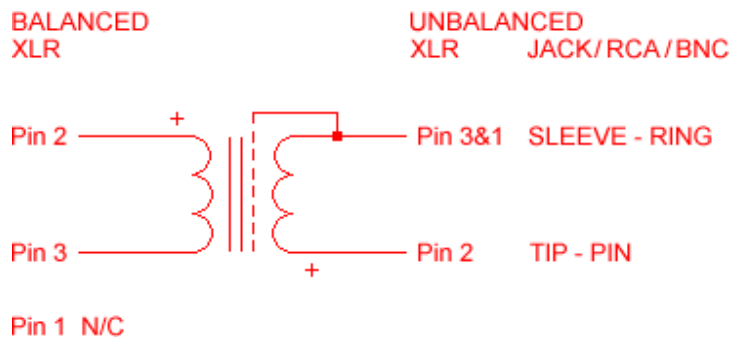

Turns ratio	1:1
Static resistance of primary	260 Ω
Static resistance of secondary	205 Ω
Core	Amorphous strip core
No-load impedance	typically > 40 kΩ @ +15 dBu, 50 Hz
Frequency response @ 0 dBu (source 600 Ω, load 10kΩ)	40Hz-100kHz +0.5 dB
Insertion loss (source 600 Ω, load 10kΩ)	Typically 0.2dB
Isolation between windings:	1 kV
Maximum level before saturation	+10dBu (30Hz)