

MOUNTING BRACKETS FOR CANFORD COMPACT POWER AMPLIFIER

20-319 CANFORD MOUNTING BRACKETS For compact power amplifiers (pair)

DESCRIPTION

Mounting brackets for the Canford Compact Power Amplifier. The amplifier is a mains powered device for use with small monitor speakers such as the LS3/5a and for general purpose use whenever a rugged medium powered, high quality mono amplifier is required. It may be attached to the rear of the speaker or other suitable surface using the mounting brackets.

These fitting instructions are to be used for the mounting of the following Canford Compact Power Amplifiers:

- 20-311 Line input, electronically balanced
- 20-312 Line input, transformer balanced
- 20-313 Mic. Input, electronically balanced

CONTENTS

- 2x Mounting brackets
- 6x No.10 Wood screw
- 6x M5 plain washer

FITTING INSTRUCTIONS

Decide where the amplifier is to be located ensuring that the controls and connectors will be accessible with no obstructions once the amplifier is mounted.

Using a 3mm drill bit, drill 6 pilot holes in the desired location, as outlined in the drawing

'Fig 1: Mounting Bracket Fixing Positions'.

Fix one of the mounting brackets to the surface using three of the No. 10 wood screws and washers. Once this is secure offer up the amplifier ensuring that the bracket mates with the groove in the side of the unit. Place the other bracket in position and fix to the surface using the remaining screws and washers. This completes the fitting of the brackets.

All cabling can now be connected to the amplifier.

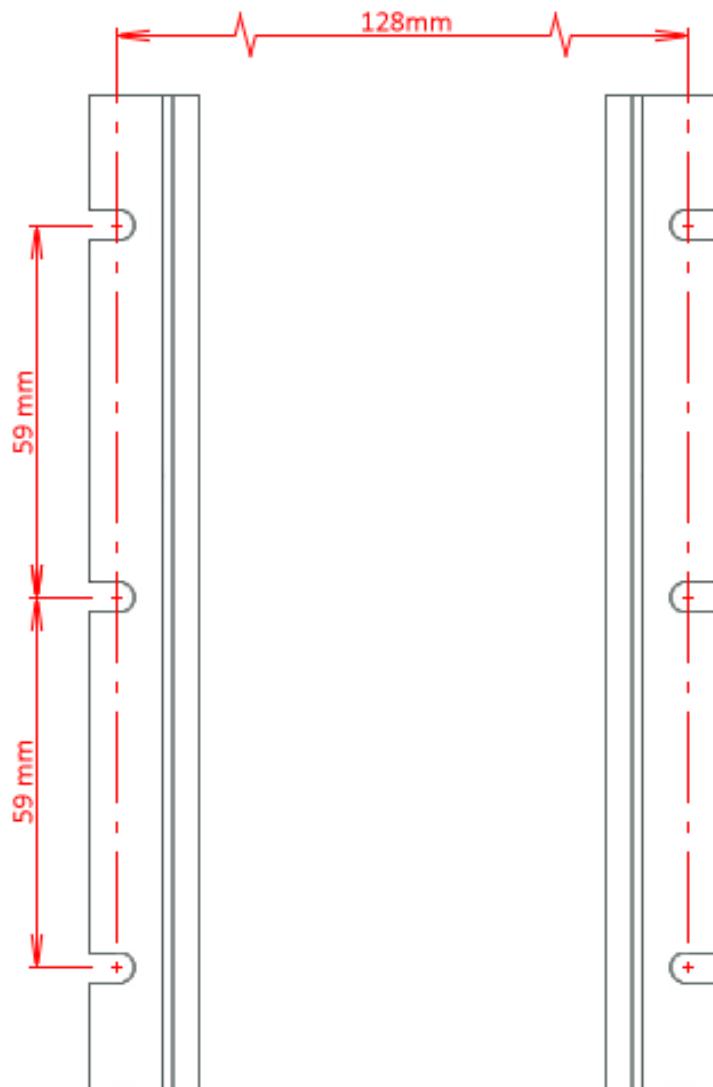


Fig 1: Mounting Bracket Fixing Positions
Drawing not to scale