


FLEXIBLE MAINS 3 core, Black rubber

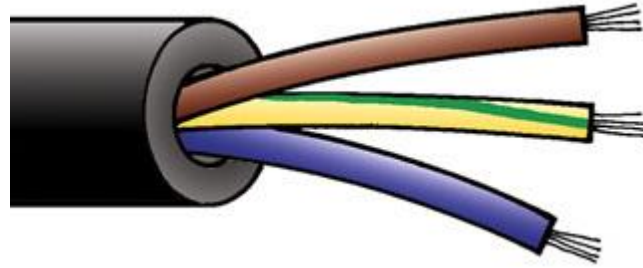

- 33-341 FLEXIBLE MAINS 3 core 1.5 sq.mm, Black rubber
- 33-351 FLEXIBLE MAINS 3 core 2.5 sq.mm, Black rubber
- 33-371 FLEXIBLE MAINS 3 core 6 sq.mm, Black rubber

H07RN-F cables characterised by flexible plain copper conductors with a rubber insulation surrounded by a further Polychloroprene sheath. H07RN-F cables have the capacity to withstand most weather conditions with good resistance to oils and greases. Also good at withstanding mechanical and thermal stresses.

Temperature rating -25°C to 60°C
 Voltage 450/750V
 Outer sheath colour Black

	Size mm ²	Stranding	Voltage Drop V/A/km	Resistance Ω/km	O.D. mm	Weight kg/km
33-341	1.5	30/0.25	23	13.7	9.9	128
33-351	2.5	50/0.25	14	8.21	11.8	187
33-371	6	84/0.30	6.7	3.3	14.8	390