

18-092 CANFORD BRACKET For Canford Diecast loudspeaker, allows tilt-angle adjustment

Surface mounting bracket for the 76-361 Canford Diecast freestanding loudspeaker. Bracket attaches to either the top or bottom M6 tapped mounting hole on the loudspeaker casing. Loudspeaker 'platform' can be adjusted in 30° increments to allow tilting/positioning with respect to the surface the bracket is fixed to. Assembly drawing with basic dimensions on page 2 of this document.

Material: Bracket manufactured from CR4 Steel

Finish: Black Epoxy Powder Painted

Contents:

1x	CANFORD DIECAST LOUDSPEAKER BRACKETS	Surface/wall bracket and loudspeaker 'platform'.
1x	M5 SLOTTED SCREW Pan, MS, CB, 12mm	Hinge pin.
1x	M5 FULL NUT Hex, MS, CB	Hinge pin securing nut.
1x	M5 SHAKEPROOF WASHER MS, CB	Hinge pin nut washer.
1x	M6 POZI SCREW Pan, MS, CB, 8mm	Loudspeaker securing screw.
1x	M6 SINGLE COIL SPRING WASHER, MS, CB	Loudspeaker securing screw washer.
3x	ST3.5 (No.6) POZI SELFTAP SCREW Pan, 25mm	To attach bracket to wall/surface.
		Additional or alternative fixings may be required to
		ensure secure mounting dependent on installation.

Spare Parts:

09-567 CANFORD DIECAST LOUDSPEAKER BRACKETS

14-045 M5 FULL NUT Hex, MS, CB (pack of 100)

14-282 M5 SLOTTED SCREW Pan, MS, CB, 12mm (pack of 100)

14-774 M5 SHAKEPROOF WASHER MS, CB (pack of 100)


14-178 M6 POZI SCREW Pan, MS, CB, 8mm (pack of 100)

14-957 M6 SINGLE COIL SPRING WASHER, MS, CB (pack of 100)

14-597 ST3.5 (No.6) POZI SELFTAP SCREW Pan, AB, MS, CB, 25mm (pack of 100)



18-092 CANFORD BRACKET For Canford Diecast loudspeaker

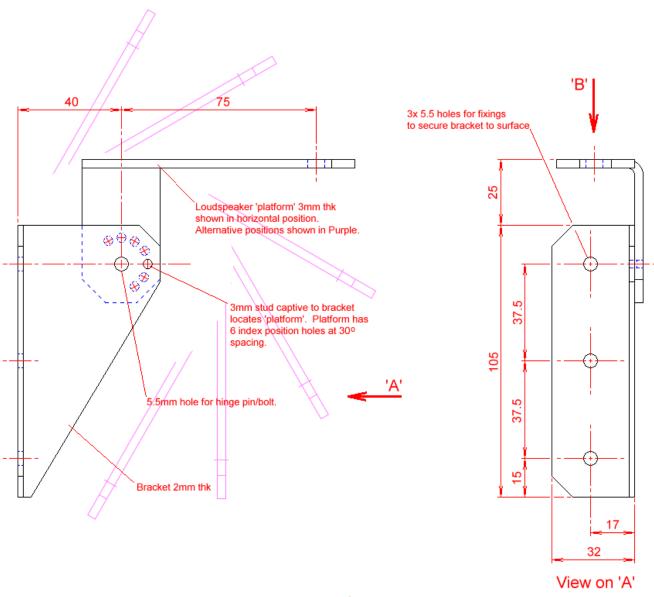

Assembly Drawing All dims in mm Not to scale

