


53-195 CANFORD GOOSENECK MICROPHONE 400SB Black

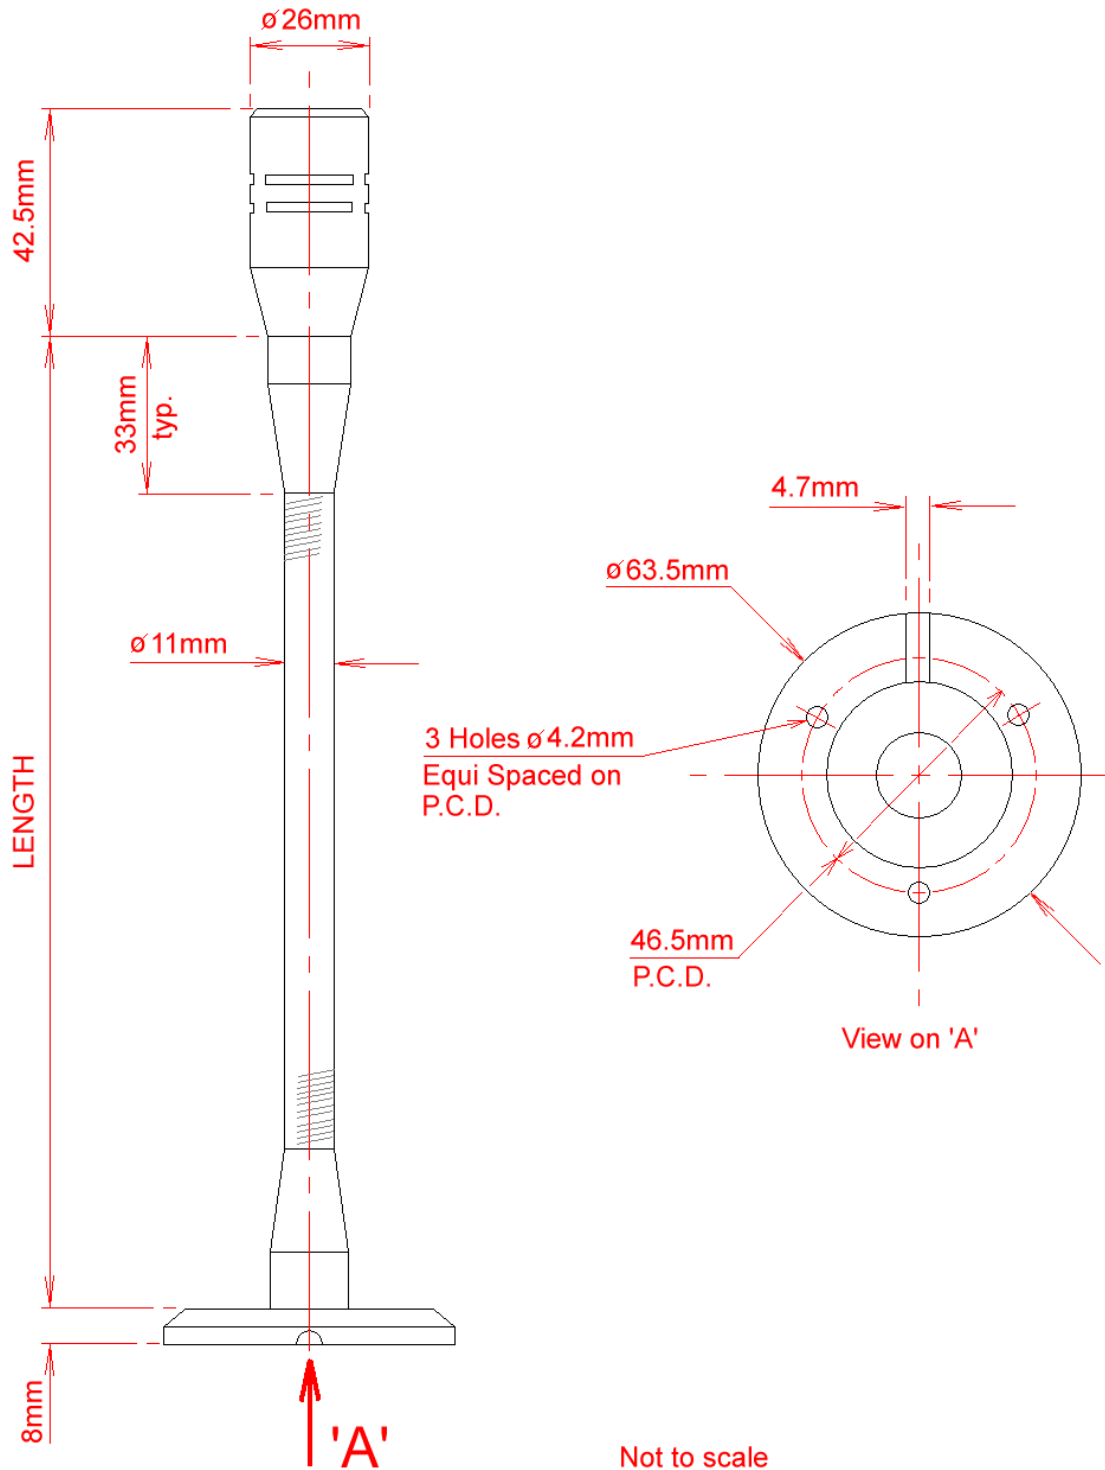

Not to scale

LENGTH = 400mm

A high quality 200 ohm dynamic capsule in an attractive black finish robust metal housing, with foam windshield insert. The microphone is particularly suited to communications and paging applications, having a response with a peak in the middle of the speech band and good back-to-front rejection ratio.

Impedance:	200 ohms
Sensitivity:	0.3mV/ μ Bar (-70dBv)
Frequency range:	100Hz-7kHz (+8dB peak around 4 kHz)
Polar response:	Cardioid
Front-to-back rejection:	16dB (1kHz)
Head diameter:	26mm