




ASSEMBLY INSTRUCTION

NYS-SPP-L1 | 1/4" Patch Panel - Grounding Variations

The flexible grounding system, applicable for each channel separately, provides the following alternatives:

- **Individual (without grounding clip):** Each channel ground (sleeve contact) is connected to the dedicated ground contact of the incoming 1/4" plug only. This is the standard configuration.
- **Chassis common (1):**
The relevant channel grounds (sleeve contacts; top and bottom row) is connected to the ground flat tab via grounding clip and chassis.
- **Chassis top (2):**
The dedicated top row channel ground (sleeve contact) is connected to the ground flat tab via grounding clip and chassis.
- **Chassis bottom (3):**
The dedicated bottom row channel ground ("S" terminal) is connected to the ground flat tab via grounding clip and chassis.

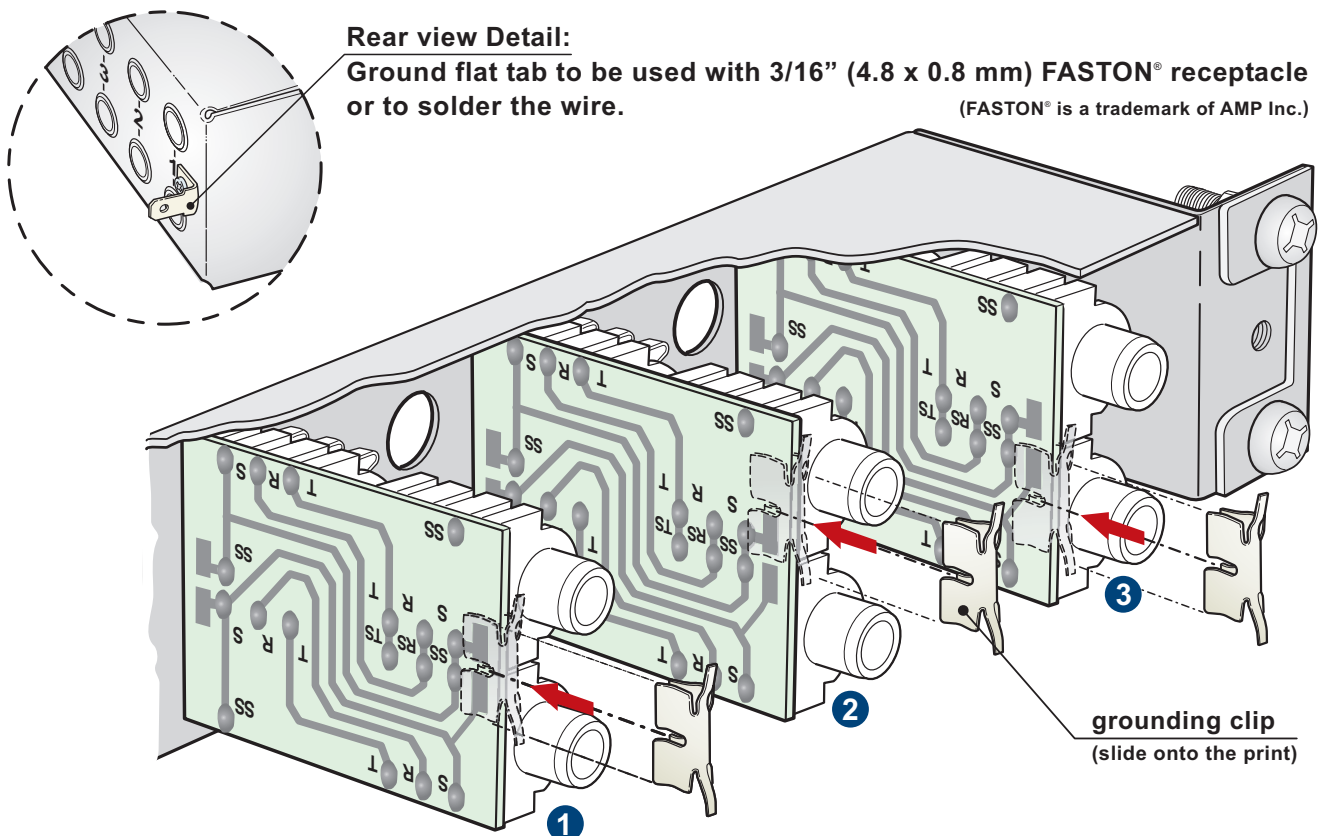

The grounding clips are applicable in every electrical configuration.
For electrical configurations please refer to the printed information on the Patch Panel.

NEUTRIK AG	LI	T: +423 / 237 24 24	F: +423 / 232 53 93	NEUTRIK France	FR	T: +33 1 / 4131 6750	F: +33 1 / 4131 0511
NEUTRIK USA Inc.	USA	T: +1 732 / 901 9488	F: +1 732 / 901 9608	NEUTRIK Tokyo Ltd.	JP	T: +81 3 / 3663 4733	F: +81 3 / 3663 4796
NEUTRIK (UK) Ltd.	UK	T: +44 1983 / 811 441	F: +44 1983 / 811 439	NEUTRIK Hong Kong Ltd.	HK	T: +852 / 2687 6055	F: +852 / 2687 6052
NEUTRIK Vertriebs GmbH	DE/NL/AT/DK	T: +49 8131 / 280 890	F: +49 8131 / 280 830	NEUTRIK Ningbo	CN	T: +86 574 / 882504880	F: +86 574 / 88265000

Draft. Nr.: BDA 175 / 3102M14511 | Update: 30.03.2010 | Data subject to change without prior notice. ©2010 NEUTRIK®. ALL RIGHTS RESERVED.