


- 58-381 SIFAM AUDIO LEVEL METER AL19WF
- 58-382 SIFAM AUDIO LEVEL METER AL29WF
- 58-383 SIFAM AUDIO LEVEL METER AL39WF

A lower cost alternative to the standard range of Sifam full specification VU meters. The specification for the AL range is based on BS6840 : Part 17, IEC 268-17 : 1990, but does not fully meet the dynamic range characteristics. The AL-WF meters are suitable for rear of panel mounting, together with bezel, with a rear zero adjust and tab terminals as standard. Top illumination kits are available as optional accessories. Front-of-panel mounting versions are available to special order.

ILLUMINATION KITS

- 58-384 SIFAM ILLUMINATION KIT Festoon lamp type, for AL19WF meters (with 12V lamp)
- 58-385 SIFAM ILLUMINATION KIT Festoon lamp type, for AL29WF meter (with 12V lamp)
- 58-386 SIFAM ILLUMINATION KIT Festoon lamp type, for AL39WF meters (with 12V lamp)

SIFAM PRESENTOR AL AUDIO LEVEL METER WF MOUNTING

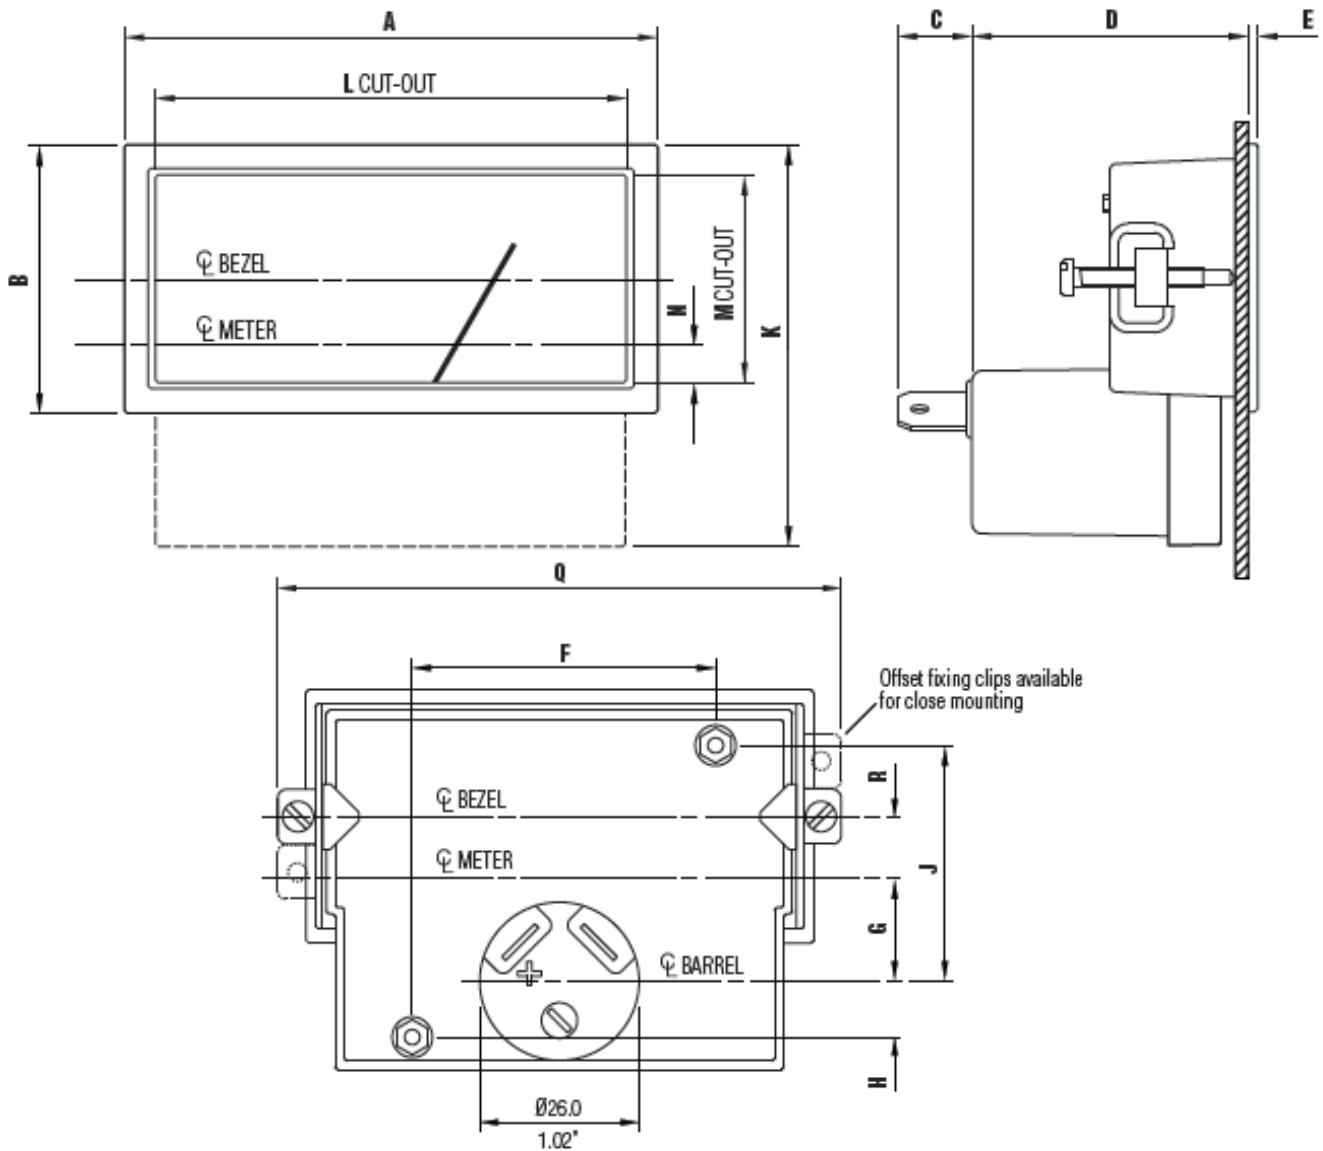

	58-381 19WF		58-382 29WF		58-383 39WF	
	mm	inches	mm	inches	mm	inches
A	49.2	1.94	82.8	3.26	101.0	3.98
B	27.0	1.06	41.6	1.64	50.5	1.99
C	11.5	0.45	11.5	0.45	11.5	0.45
D	40.8	1.61	42.9	1.69	43.4	1.71
E	1.5	0.06	1.5	0.06	1.6	0.06
F	32.0	1.26	47.8	1.88	57.2	2.25
G	6.10	0.24	16.7	0.66	28.7	1.13
H	Fixing studs on horizontal plan, 7.0mm/0.28" above barrel CL.		9.70	0.38	8.6	0.34
J			38.0	1.50	48.5	1.90
K	40.6	1.60	62.2	2.45	76.1	2.99
L	47.0	1.85	80.0	3.26	98.0	3.86
M	24.0	0.95	37.0	1.46	46.0	1.81
N	5.2	0.20	8.10	0.32	10.2	0.40
Q	58.5	2.30	90.6	3.57	108.6	4.28
R	6.8	0.27	10.3	0.41	12.8	0.50