


SPECIALTY

Technical Data Sheet



CHROME XC

- Economical And Easy To Install
- Resists Gasoline And Engine Chemicals
- Conductive Mylar For Shielding Applications
- Ideal For Exposed Applications
- Cut And Abrasion Resistant

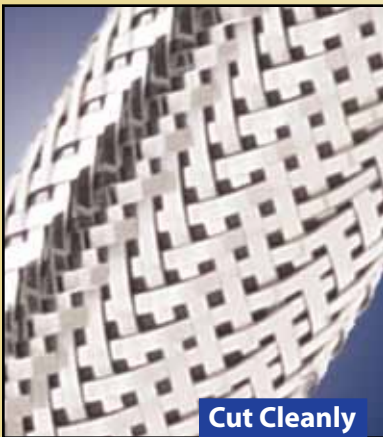

Cut Cleanly
Hot Knife

Material
Mylar

Grade
CXN

Monofilament Diameter
.005"

Drawing Number
TF001CXN-WD

| Nominal Size | Part # | Expansion Range | | Bulk Spool | Shop Spool | Available Colors | Lbs/100' |
|--------------|-----------|-----------------|--------|------------|------------|------------------|----------|
| | | Min | Max | | | | |
| 1/4" | CXN0.25SV | 1/4" | 5/16" | 500' | 125' | SV & GL | 0.25 |
| 5/16" | CXN0.31SV | 5/16" | 1/2" | 250' | 100' | SV & GL | 0.36 |
| 1/2" | CXN0.50SV | 1/2" | 3/4" | 250' | 80' | SV & GL | 0.52 |
| 3/4" | CXN0.75SV | 3/4" | 1 3/8" | 200' | 40' | SV & GL | 0.83 |
| 1 1/4" | CXN1.25SV | 1 1/4" | 2" | 100' | 30' | SV & GL | 1.25 |
| 1 1/2" | CXN1.50SV | 1 1/2" | 3" | 100' | 25' | SV & GL | 1.50 |

Impressive High Performance Braided Metal Looks

No installation hassles. No surface abrasion. No ridiculous expense. Just the look of polished braided steel.

These heavy duty metallized mylar sleeves are ideal for dressing up any application with the look of braided stainless steel. The standard CH has a more open look, with transparent PET braided together with the metallic strands to create a slight glimmer when light strikes it and to allow the color of the application to come through for a special effect.


Our new X-tra coverage product, Chrome XC, provides fuller coverage with no transparent elements in the braided construction and results in a smooth, continuous metallic shine on any application. Application possibilities include installing clear heatshrink tubing over hoses covered with Chrome for a unique effect.

Colors Available:



Silver (SV) and Gold (GL).

- Colors Available: Silver (SV) & Gold (GL)

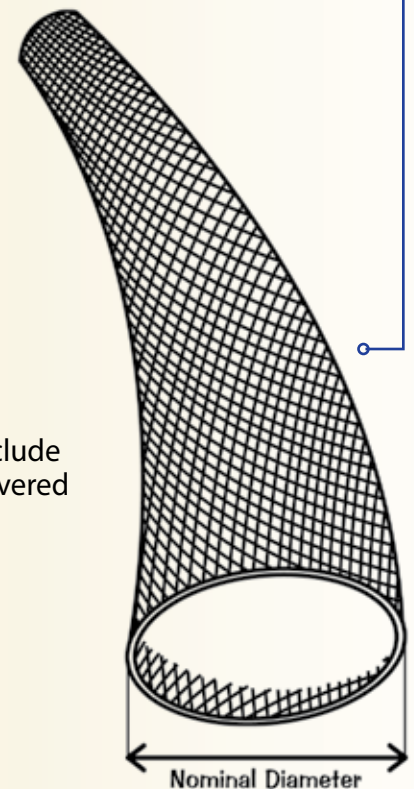

- Application possibilities include installing clear heatshrink tubing over hoses covered with Chrome for a unique effect.



www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871



HALOGEN FREE



CHROME XC



Abrasion Resistance
Medium

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
70°F

Humidity
50%

Scuffing And A Few
Chrome Strands Broken
20 Test Cycles

Wear Pattern Continues
400 Test Cycles

Strands Beginning To
Break Down Rapidly
600 Test Cycles

Braid Worn Through
In Both Directions
Material Destroyed
700 Test Cycles

Pre-Test Weight
2,906 mg

Post-Test Weight
2,783.3 mg

Test End Loss Of Mass
Point Of Destruction
122.7 mg



Chemical Resistance

1=No Effect 4=More Affected
 2=Little Effect 5=Severely Affected
 3=Affected

| | |
|----------------------------------|------|
| Aromatic Solvents _____ | 2 |
| Aliphatic Solvents _____ | 1 |
| Chlorinated Solvents _____ | 3 |
| Weak Bases _____ | 1 |
| Salts _____ | 1 |
| Strong Bases _____ | 3 |
| Salt Water 0-S-1926 _____ | 1 |
| Hydraulic Fluid MIL-H-5606 _____ | 1 |
| Lube Oil MIL-L-7808 _____ | 1 |
| De-Icing Fluid MIL-A-8243 _____ | 1 |
| Strong Acids _____ | 3 |
| Strong Oxidants _____ | 2 |
| Esters/Keytones _____ | 1 |
| UV Light _____ | 1 |
| Petroleum _____ | 1 |
| Fungus ASTM G-21 _____ | 1 |
| Halogen Free _____ | Yes |
| RoHS _____ | Yes |
| SVHC _____ | None |

Melt Point
 ASTM D-2117
500°F (260°C)

Maximum Continuous
 Mil-I-23053
302°F (150°C)

Minimum Continuous
-94°F (-70°C)



PHYSICAL PROPERTIES

| | |
|--|-----------|
| Monofilament Diameter _____ | .005 |
| ASTM D-204 | |
| Recommended Cutting _____ | Hot Knife |
| Colors _____ | 2zz |
| Wall Thickness _____ | .013 |
| Specific Gravity ASTM D-792 _____ | 1.3 |
| Moisture Absorption _____ | .1-.2 |
| % ASTM D-570 | |
| Hard Vacuum Data ASTM E-595 at 10-5 torr | |
| TML _____ | .19 |
| CVCM _____ | .00 |
| WVR _____ | .14 |
| Outgassing _____ | Med |
| Oxygen Index _____ | 21 |
| ASTM D-2863 | |